

RC element 24...48 V AC, 24...70 V DC Surge suppressor for mounting to contactor Size S0 Without/with auxiliary switch blocks !!! Phased-out product !!! Successor is SIRIUS 3RT2 Preferred successor type is >>3RT2926-1CB00<<

product brand name	SIRIUS
product designation	surge suppressor
General technical data	
certificate of suitability	CE / UL / CSA
size of contactor	S0
Substance Prohibittance (Date)	07/01/2006
Weight	0.022 kg
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	24 ... 48 V
• at 60 Hz rated value	24 ... 48 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage at DC rated value	24 ... 70 V
design of the surge suppressor	RC element

Ambient conditions	
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C

Approvals Certificates		
General Product Approval	EMV	Test Certificates



EG-Konf.



UR



RCM

[Special Test Certificate](#)

Maritime application	other
----------------------	-------



ABS



DNV



PRS



[Confirmation](#)

[Miscellaneous](#)

Railway	Environment
---------	-------------

[Special Test Certificate](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>


Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=3RT1926-1CB00>

[Cax online generator](#)

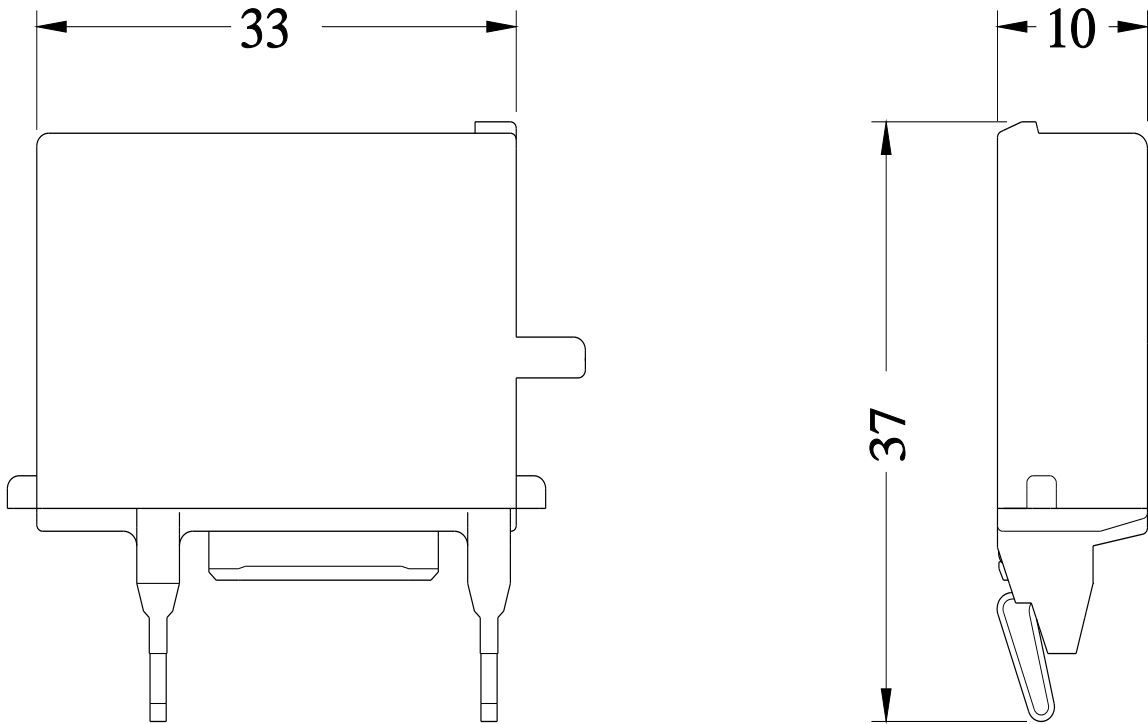

last modified:

4/2/2025 